






Original doggydocks®

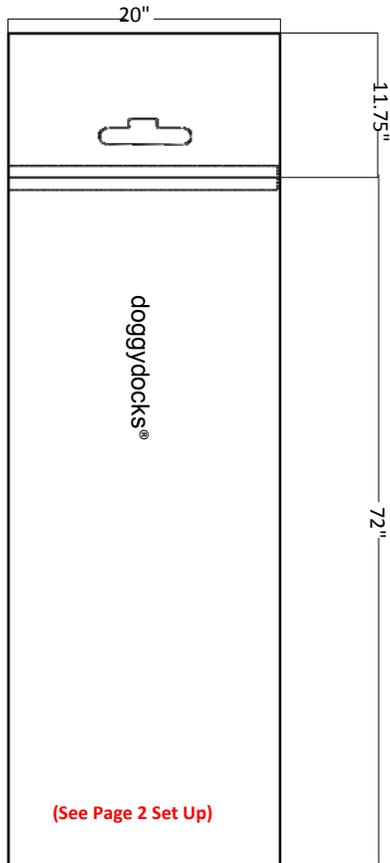

Jumbo doggydocks®

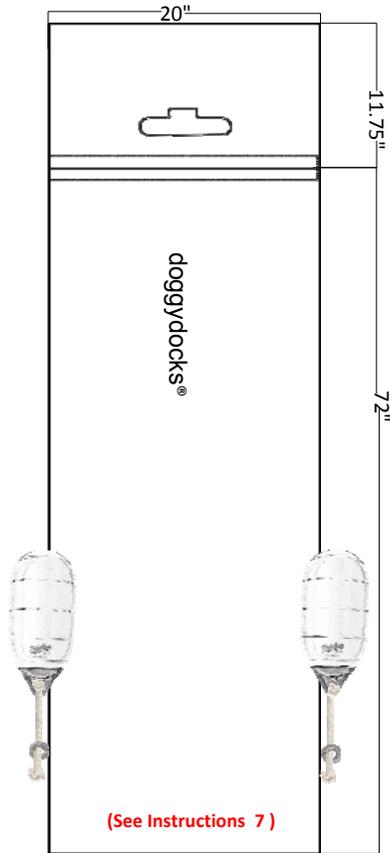

doggydocks®
Extension

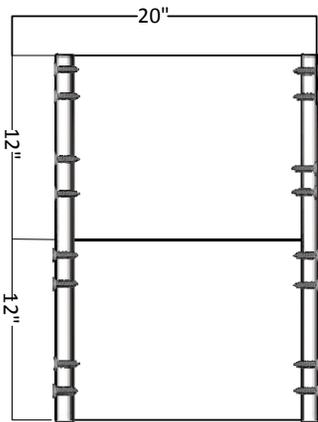


Stabilizer Bars



NOTE:
Stabilizer Bars Do Not
Float! We recommend
securing with a strap
when in use.

**Stabilizer Bars
Folding Model and
Extensions**

Snapbag™
for All Models

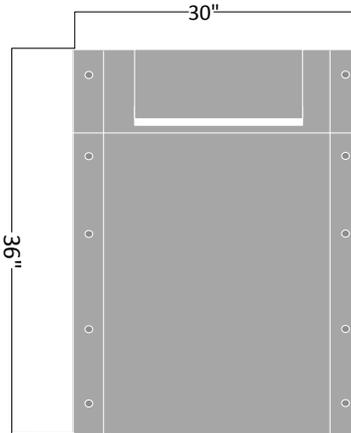

Jumbo Kit Contents



- (2) Stainless Steel Eye-Hooks
- (1) Inflation Adapter
- (2) Buoys 8" x 19"
- (2) 24" Polypropylene Rope

(See Instructions Page 7)



Note:

The SnapBag™ is adjustable to ensure proper floatation angle and to compensate for the weight of the dog and the height of the mounting platform.



To achieve the correct position, you will need to try different positions when attaching the SnapBag. You may also need to add or remove foam blocks to the SnapBag. Buoyancy is different in salt water and requires less floatation.

Position the doggydocks so the middle of the hinge is directly on the edge of the mounting platform as shown on the drawing.

The angle of the doggydocks® is determined by three factors.

1. The distance from the dock to the top of the water.
2. The weight of your dog
3. The position of the SnapBag.


If the doggydocks® becomes too steep while your dog is moving and you have tried the floatation in several positions, Check the following. The distance from the dock and the weight of your dog. If your dog is over 55 Lbs and the distance is greater than 24", you may need an Extension Kit.

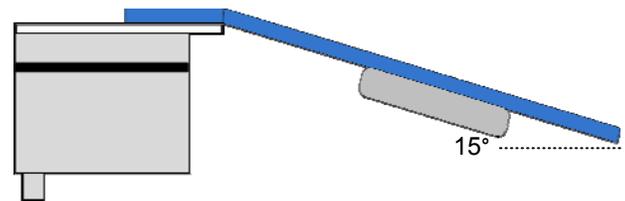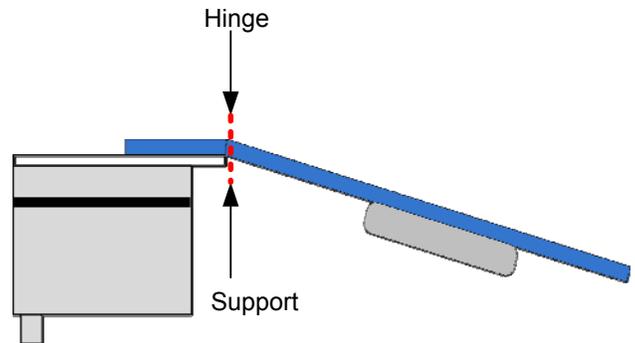

- 5 -10 Position the bag closer to the mounting location
- 10-30 Position the bag in the middle
- 30-65 Position one or two snaps closer to the end
- 65-85 Position approximately 12" from the end

NOTE:

Allow for 15% additional weight when dog is wet.

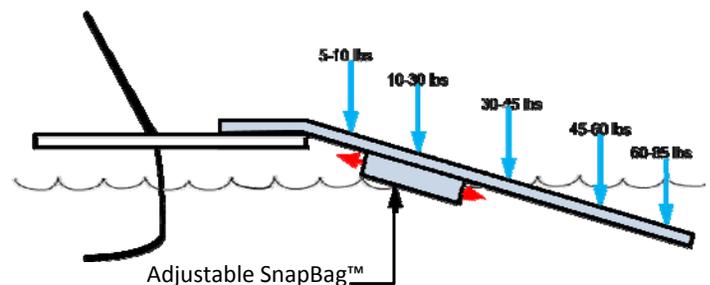

Attaching the SnapBag™

Insert foam blocks into the SnapBag™
Attach SnapBag™ to back of doggydocks.

Before attaching the SnapBag™ please see page 6 to become familiar with the Pull-the-DOT® Locking Snap Fasteners System.

Disclaimer:

Never leave your dog unsupervised in or around water. doggydocks® are not intended for use by humans, livestock or wildlife. doggydocks® are not intended as a personal floatation device or a life saving device for your dog. doggydocks® should always be used under adult supervision.




Making sure you place the doggydocks in the correct position is the most important step to ensure your doggydocks works properly. The middle of the hinge must be supported by the edge of the mounting surface.

Use a square and mark a line exactly **2-½"** from the edge of the front of the swivel cleat to the mounting surface as shown in **Fig A**. Use the Swivel Cleat base **Fig B** as template and trace the entire Swivel Cleat making sure you keep it **2-½"** from the edge. Once you have a clear outline, position the base and trace the holes. Drill the holes and follow the instructions for installing the Swivel Cleat on **Page 4**.

If you are not using the Swivel Cleat as a method of attachment you will still need to measure and mark the Cleat Board so the center of the hinge is on the edge of the mounting surface.

Note:

The hinge is not designed to carry weight. Failure to mount the doggydocks as per the instructions will void your warranty. Please refer to illustration for correct placement.

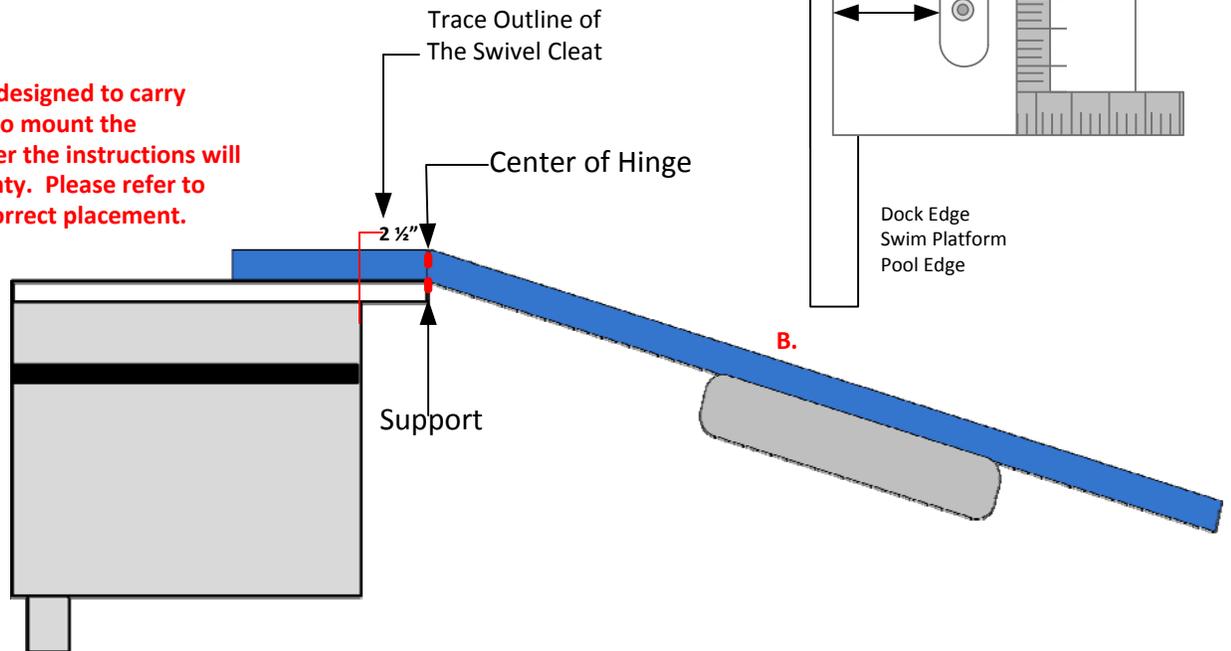

Placing doggydocks® in Water

- Step 1.** Install Swivel Cleat (As shown above.)
- Step 2.** Attach SnapBag by snapping to back of doggydocks.
- Step 3.** With the Snapbag attached, slide doggydocks carpet side down until the end touches the water.
- Step 4.** Flip the doggydocks and place the cleat board over the Swivel Cleat.
- Step 5.** Once on the Swivel Cleat, loosen thumbscrew and turn top of the Swivel Cleat 90° or 180°. Tighten thumbscrew so there is no lateral or horizontal movement of the doggydocks.

Tools Needed

- Square
- Tape Measure
- Marking Pencil
- Extra Rope Or Twine
- Cordless Screw Driver
- Drill Bits 3/8" 7/32"



Step 1. Measure a line 2-½" from edge and mark a straight line 8" wide . Place the Swivel Cleat on the line and trace the base of the Swivel Cleat.

Step 2. Using the base as a template, measure and mark locations for Pilot Holes.

Step 3. Drill pilot holes, use size 17/32" drill bit and drill through the mounting surface

Step 4. Place ¼-20 x 2.5" Hex Bolt, through the top of the Swivel Cleat and press the hex head so it is flush with the bottom of the top.

Step 5. Insert both 3.5 x 5/8" hex bolts through the top side of base and mounting surface.

Step 6. Tighten the bolt from the underside using nuts and washer

Step 7. Once the base is firmly installed, place the TOP Swivel Cleat over the 1/4-20 Bolt on the base and tighten using the Round Knob.

Step 8. Turn the Top so it matches the base. Place doggydocks over the Swivel Cleat. Loosen the Knob enough so it doesn't drag the edges the carpet. Turn the TOP Piece 90 or 180 degrees and tighten the knob, so the doggydocks mounting board does not move in any direction.

Hardware Contents:


- 1) Swivel Cleat Base (Mounts to Dock or Swim Platform)
- 1) Swivel Cleat Top (Rotates and locks down doggydocks)
- 2) 5/16" Machine Thread Tap Bolts
- 2) Medium Flat Washers
- 2) 5/16" Nylon Insert Lock Nuts
- 1) ¼-20 Tap Bolt with Hex Head (See Note)
- 1) ¼-20 Round Knob
- 1) 1/4" Flat Washer

Note:

The Hardware that is included with the Swivel Cleat is for underside mounting. However if your dock is wood, you have the option of installing the Swivel Cleat from the top side, however the hardware you will need are (2) 5/16" x 3" Lag Bolts. And (2) Washers.

Placing the doggydocks® in the water

Place the doggydocks® so that the carpeted side is down and the SnapBag™ is up. Carefully slide the doggydocks® into the water and flip it face up. Slip the cleat cut out over the Swivel Cleat and tighten the round knob so there is no movement on the doggydocks.

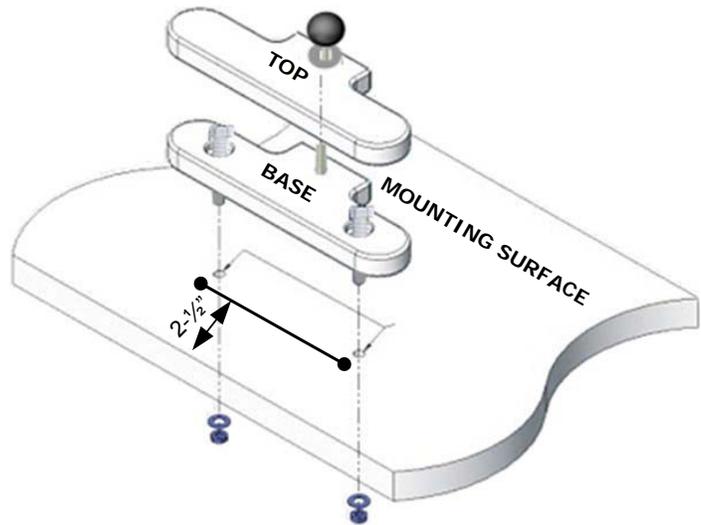

Important Notes:


We have eliminated the lock washer and thumb screw previously used to tighten the top of the Swivel Cleat, Located on the underside of the Swivel Cleat TOP.

We have cut a hexagon shape countersink that will prevent the bolt from turning while tightening the knob on top.




The hex bolt has been pressed into the hex shaped opening for your convenience. You may need to press the head of the bolt into the countersink. This is easily accomplished using a vice or hammer. Make sure that the bolt is lined up with the hex shaped cut out. Make sure you have the hex head flush, so the base of the swivel cleat sits flush.

If the hex bolt is already pressed into place, you will need to turn the Swivel Cleat's TOP and BASE Pieces to separate and install the BASE.

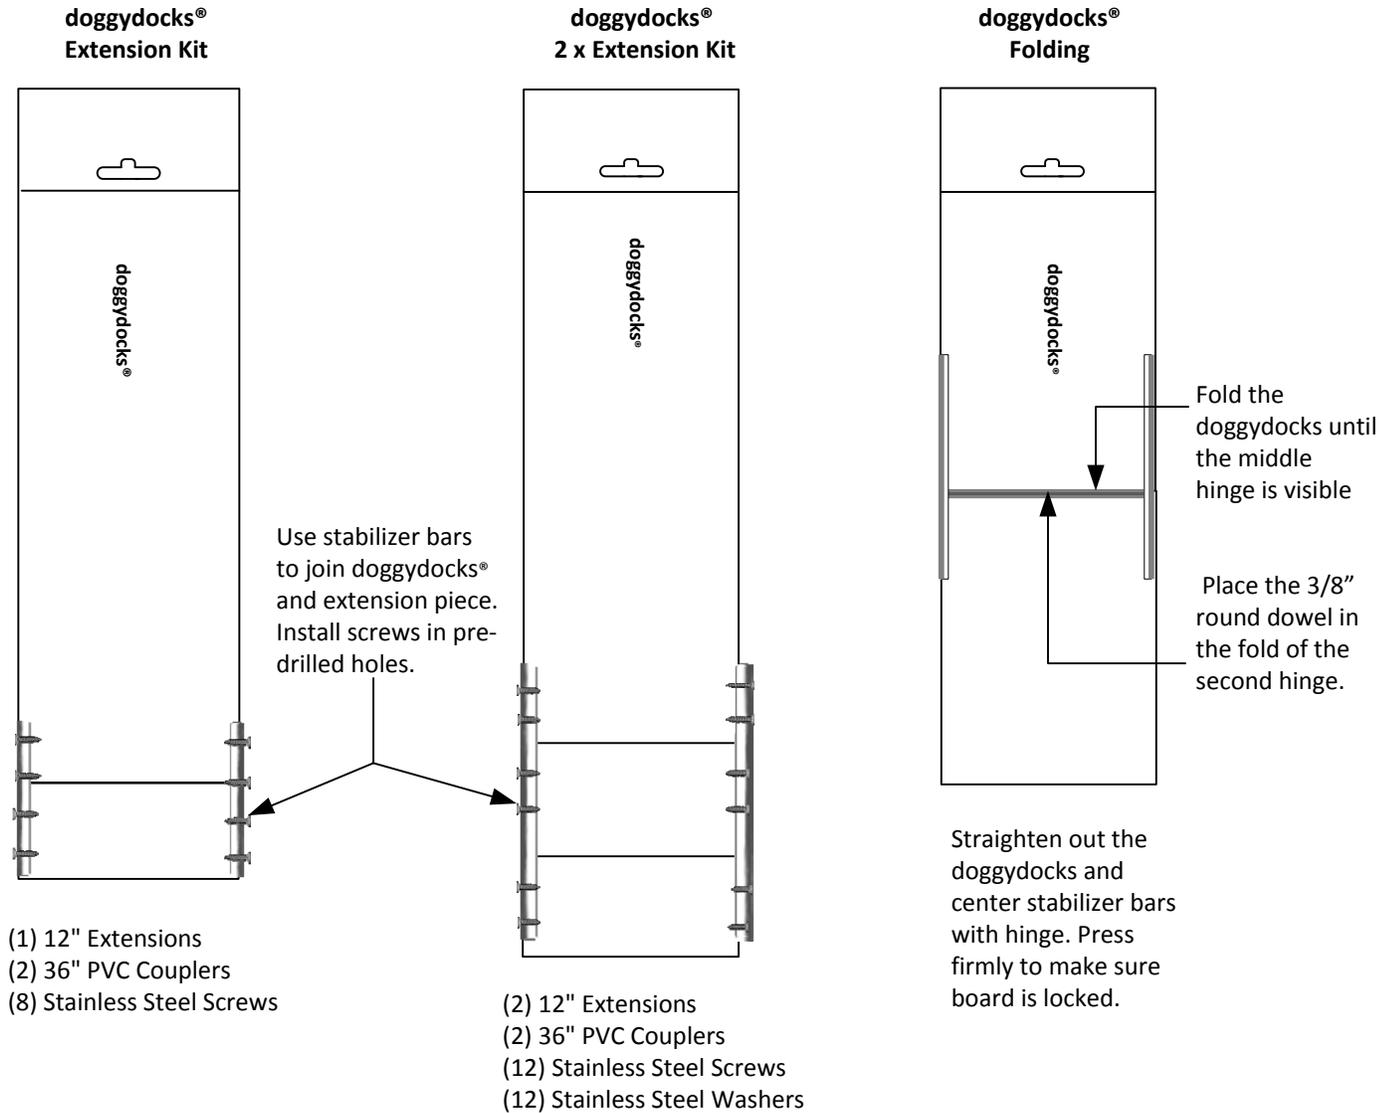

Instructions for Securing Coupler Bars to Extensions

Lay doggydocks on flat a flat surface. Align the extensions, so they are flush. Tap the coupler bar over the doggydocks and extensions. Once the coupler is on snug, use a small hammer to tap the bar so it has equal space with all three pieces. Place washer inside recessed pilot hole and screw the coupler bar into doggydocks. Be careful not to over tighten screw.

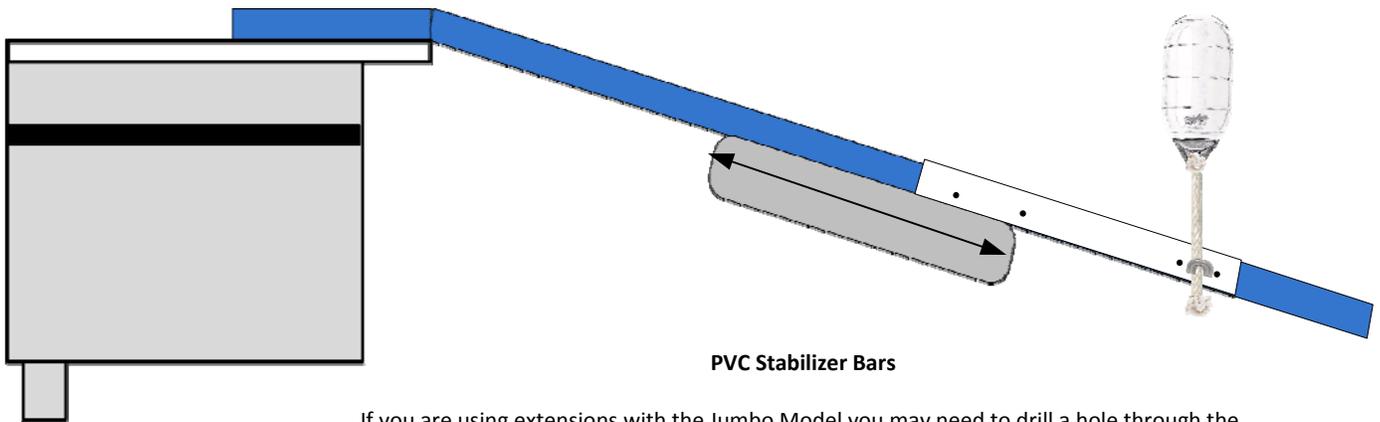

PVC Stabilizer Bars

If you are using extensions with the Jumbo Model you may need to drill a hole through the PVC stabilizer bars for the eye hooks.

Before drilling a pilot hole in the PVC, first find the best position for the buoys. To find the best angle for your dog. Inflate the buoys. then thread a rope or line through the eye of both buoy's. Loop the rope around the bottom of the doggydocks and have your dog walk up the doggydocks. Depending on the angle, keep moving the rope until you find the correct angle for your dog.

Adjusting the SnapBag™

Depending on the weight of your dog, You will need to adjust the position of the SnapBag™. For lighter dogs, position the SnapBag towards the top. For bigger dog's you will want to move it closer to the water.

You will want to use a strap or line to temporarily position the SnapBag until you find the optimum location to save from having to snap and unsnap from the back of the board.

The Snap Bag™ is made with Premier Water Proof Boat Fabric that is a UV and mold resistant Marine Material.


IMPORTANT PLEASE READ BEFORE ATTACHING SNAPBAG

Pull-the-DOT® Locking Snap Fasteners

Is a Directional is a heavy-duty three-sided locking snap fastener is designed to withstand extreme pressure on three sides without unlocking. When pulled on the fourth side, where the **Pull-The DOT® trademark** appears, the fastener releases instantly. Pull from the protrusion side to open. Close the snap by closing the lip side first and then the protrusion side.

Pull-the-Dot Snaps are very tight, and they require a short break in period. With time, the snap will become easier to open and close.

The "dot" for pulling will be formed when the cap is joined with the socket. The socket has a small tab that will create a small bump or "dot" in the cap when the two are joined

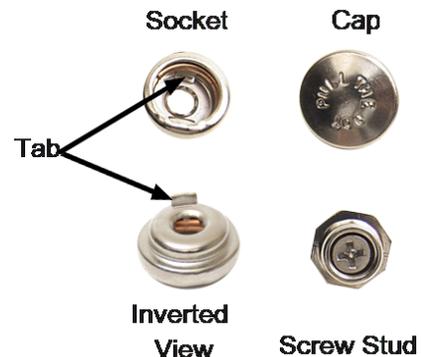



Jumbo Kit Contents




- (2) Stainless Steel Eye-Hooks
- (1) Inflation Adapter
- (2) Buoys 8" x 19"
- (2) 24" Polypropylene Rope

Positioning the Buoys

The buoys should be 8-12" from the end. Loop the rope through eyehook and adjust the length of the rope for your dog's weight.

Before drilling holes for the buoys, use a long rope and thread the buoys and loop it round the doggydocks. Once you find the best position, mark with a piece of chalk or tape. Drill or screw the hardware into the board for a permanent attachment.

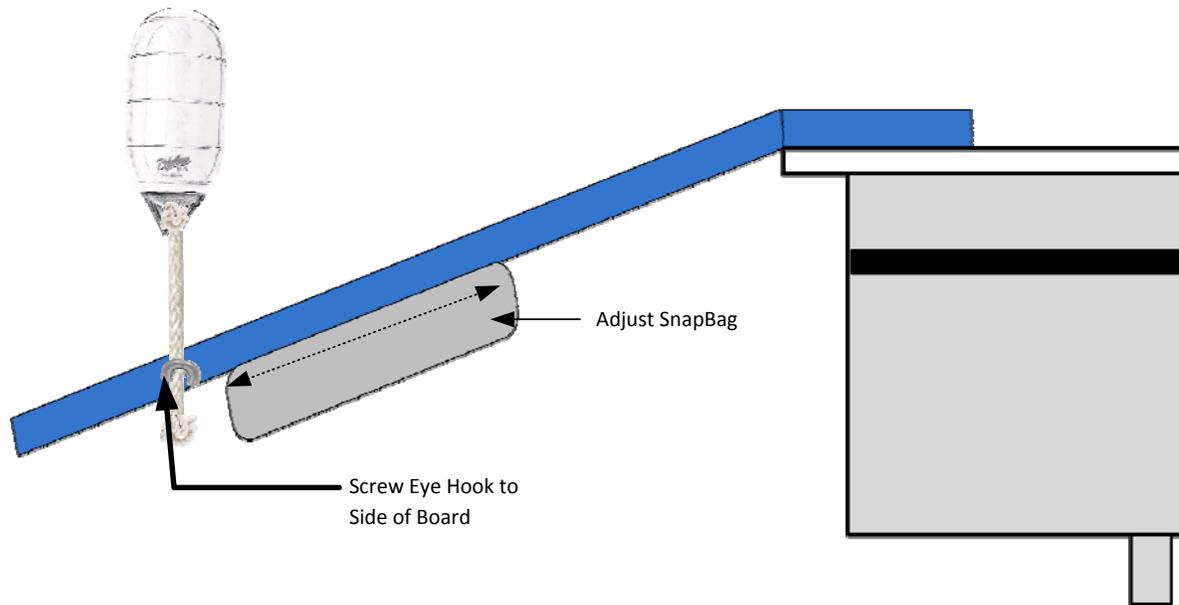

Adjusting the SnapBag™

Depending on the weight of your dog, adjust the position of the SnapBag. For lighter dogs, position the SnapBag closer to the dock. For heavier dog's, position the SnapBag towards the end of the doggydocks.



Other Great PupGear Products

PupGrass.
ARTIFICIAL GRASS BUILT FOR DOGS



Patio Lawn Kit™
Back Yard in a Box



PupGear Warranties and Return Policy

PupGear Pet Products guarantees their products for a period of one year against defects in material and workmanship; during the warranty period, we will send the customer replacement parts or the customer can return the product directly to us for repairs or replacement. Improper use or installing the product in a method not approved by PupGear will void the product warranty

PupGear is committed to customer satisfaction. If a customer is having a problem using the doggydocks and needs assistance, we offer customer support 7 days a week.

During the week our office number is 859.241.3004 On weekends please text your questions to 408.373.2277 and we will respond as soon as possible. You may also email sales@pupgearpetproducts.com

Returns

Products must be returned in unused condition, in the original carton, within 10 days of receipt of delivery. A 20% restocking fee may be applied. Outbound shipping charges on items that offer free shipping will be deducted from the refund amount.

Before returning merchandise, customer must request a return authorization. The option to request a return will only display if a customer signs in with the user name and password used when making a purchase on our website. Cancellations are subject to a 10% service charge if order is cancelled after 24 hours.

Product Disclaimer

PupGear Pet Products, their dealers, retailers, and distributors are not responsible for any use or misuse of their products other than the stated and intended use.